

FSM-40S

/ FSM-40S-B

Optical Fiber Fusion Splicer




*Front monitor type
(FSM-40S)*

*Top monitor type
(FSM-40S-B)*

FEATURES

- *Core-to-core fiber alignment system*
- *Quick "15sec" splicing and Full automatic operation*
- *NZDSF (ITU-T G.655) splicing capability*
- *Dissimilar fiber splicing capability*
- *Compact and light-weight and various power supply options*
- *2 CCD camera, No up-down mirror*
- *High resolution 5 inch color LCD monitor*
- *Automatic Arc Calibration function for stable arc discharge*
- *Automatic fiber type identifier and self diagnostic test function*
- *PC Communication function with RS232C*
(Splice results, splicing parameters, etc.)
- *Two different types to choose from*
Front monitor or top monitor

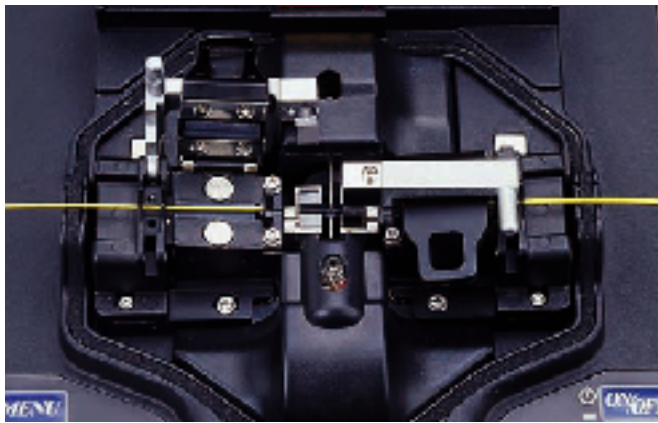

Top View of FSM-40S



Accessories

SPECIFICATIONS

● applicable fibers	SM(Singlemode), MM(Multimode) and DS(Dispersion shifted) fibers, NZ-DS (Non-zero dispersion shifted), CS(Cut-off shifted) and ED(Er doped) fibers are also applicable with special mode.
● No. of fibers to be spliced	Single to single fiber.
● Fiber cleaved length	8 to 16mm with 250um outer coating diameter. 16mm(standard) or 8 to 16mm (option) with outer coating diameter of more than 250um up to 1000um (1.0mm).
● Actual average splice loss	0.02dB with SMF, 0.01dB with MMF and 0.04dB with DSF to ITU-T Recommendations G.652, G.651 and G.653 respectively, when measured by the cut-back method to relevant ITU-T and IEC standards.
● Splicing time	Typical 15 sec.
● Return loss	>>60dB.
● Splicing modes	40 user programmable modes and up to 60 modes for reference (factory predetermined setting).
● Splice loss estimate	Core deformation and MFD mismatch as well as core axial offset can be taken into account for more accurate estimate.
● Attenuation splice function	intentional high splice loss of 0.1dB to 15dB (0.1dB step) can be made for an in-line fixed attenuator.
● Storage of splice result	The last 2000 results to be stored in the internal memory.
● Fiber display	X/Y, or both X and Y simultaneously.
● Magnification of fiber	264X or 132X.
● Viewing method	CCD camera and 5" TFT color LCD monitor.
● Altitude, Humidity and Temperature compensation	0 to 3,500m above sea level, 0 to 95%RH and - 10 to 50°C, respectively.
● Mechanical proof test	2N (standard) / 4.4N (option)
● Tube heater	Built-in tube heater with 30 heating modes.
● Applicable protection sleeve length	60mm, 40mm and a series of micro sleeves.
● No. of splices with detachable battery	Approx. 40 times (including heatings) per full charge with BTR-05.
● Power supply	Auto voltage selection from 100 to 240V.a.c. with ADC-07, 10.5 to 14Vd.c. with DCA-01 and 12Vd.c. with BTR-05.
● Wind protection	Max. wind velocity of 15m/s.
● Dimensions	172W x 186D x 180H (mm)
● Weight	FSM-40S : 4.4kg (4.9kg including AC adaptor ADC-07) FSM-40S-B : 4.7kg (5.2kg including AC adaptor ADC-07)

ITEMS INCLUDED WITH THE FSM-40S / 40S-B SPLICER KIT

Item	Description	Model	Splicer model		Q'ty
			FSM-40S	FSM-40S-B	
(1)	Detachable AC adapter / battery charger	ADC-07	●	●	1 pc.
(2)	AC power cord	ACC-XX	●	●	1 pc.
(3)	Spare electrodes	ELCTI-25	●	●	1 pair
(4)	Top cover	TC-03A	●	—	1 pc.
(5)	Top cover	TC-03B	—	●	1 pc.
(6)	Monitor cover	MC-01	●	—	1 pc.
(7)	Rugged FRP case	CC-02	●	—	1 pc.
(8)	Rugged FRP case	CC-03	—	●	1 pc.
(9)	Instruction manual	—	●	●	1 pc.

OPTIONAL ACCESSORIES

Description	Model No.
Detachable battery pack	BTR-05
Battery charge cord	DCC-08
Detachable DC adapter	DCA-01
DC power cord	DCC-01/04/05
Working table	WT-5
Working table support	WTS-4/WTS-5
J-plate (option for FSM-40S)	JP-03A
High precision fiber cleaver	CT-20 Series
Primary coat stripper	PS-02
Nylon Jacket stripper	JS-01
Alcohol dispenser	HR-1
Protection sleeves	FP-03/03(L=40),FPS01 Series

Specifications and descriptions are subject to change without prior notice.

Fujikura Ltd.

Fujikura Europe Ltd.

Alcoa Fujikura Ltd. Telecommunications Division

Fujikura Asia Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan

Phone : +81-3-5606-1164 Fax : +81-3-5606-1534 <http://www.fujikura.co.jp>

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, UK

Phone : +44-20-8240-2000 Fax : +44-20-8240-2010 <http://www.fujikura.co.uk>

260, Parkway East, Duncan, SC29334, USA

Phone : +1-800-AFL-FIBER Fax : +1-864-433-5560 <http://www.afl-link.com>

460 Alexandra Road #22-02 PSA Bldg., Singapore 119963

Tel : +65-6-278-8955 Fax : +65-6-273-7705 <http://www.fujikura.com.sg>