

Mass Fusion Splicer 41R kit

Smart Management

ACTIVE FUSION


CONTROL TECHNOLOGY

ACTIVE BLADE

MANAGEMENT TECHNOLOGY




Active Fusion Control Technology




ACTIVE FUSION CONTROL TECHNOLOGY

1. Active Fusion control by fiber count



The 41R automatically determines the number of optical fibers from a single to maximum of 4 fiber ribbon. It minimizes splice loss by performing fusion splicing according to the number of fibers.



Single fiber




4 fiber ribbon

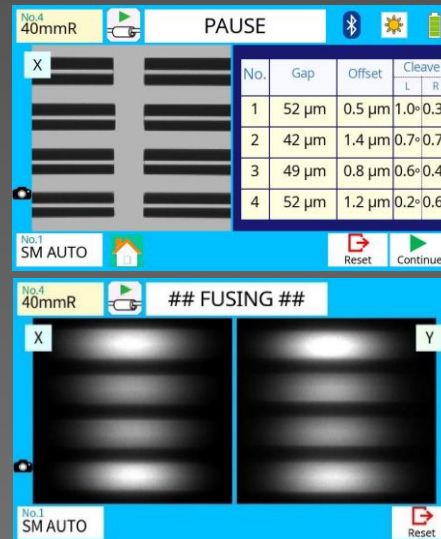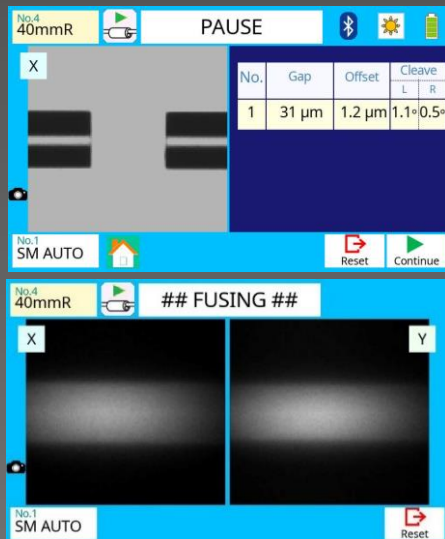


Automatic fusion control by fiber count

2. Active Fusion control in real-time

The 41R features real-time fusion power control by analyzing the fiber's brightness intensity during splicing. Therefore, it can splice the fiber using appropriate fusion parameters. The 41R does not have active core alignment mechanisms, however, during fusion, fiber surface tension effects minimize preexisting offsets.

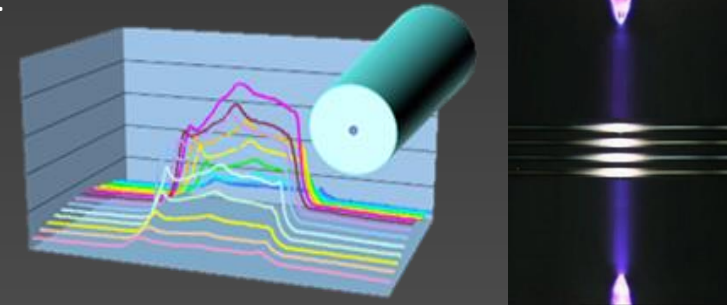


Analyzing Brightness Intensity

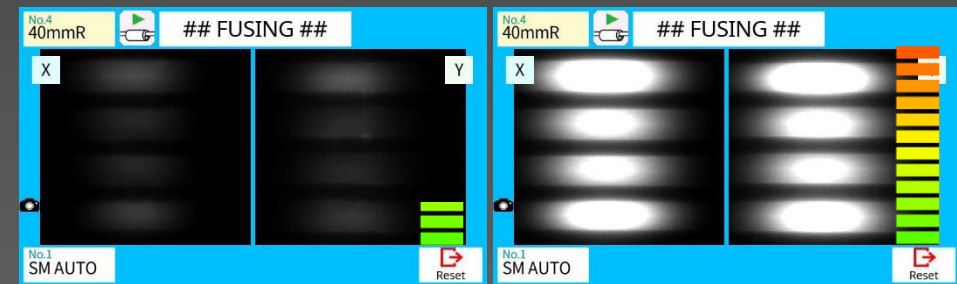

Fiber brightness : Weak

Fiber brightness : Strong


Real-time
Fusion control

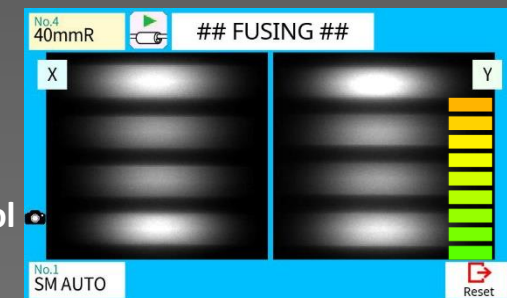

Fiber brightness : Appropriate

Real-time
Fusion control

Active Blade Management Technology



ACTIVE BLADE MANAGEMENT TECHNOLOGY

1. Active Blade rotation by motor

The 41R fusion splicer and CT50 fiber cleaver are enabled with wireless data connectivity. This capability allows automatic cleaver blade rotation when the splicer judges the blade is worn.



Motorized blade

No.4 40mmR Large Cleave Angle				
No.	Gap	Offset	Cleave	
			Left	Right
1	41 μm	0.5 μm	1.0°	1.0°
2	45 μm	0.6 μm	5.7°	0.9°
3	49 μm	0.7 μm	5.3°	0.6°
4	44 μm	0.8 μm	1.0°	0.2°

No.4 40mmR Large Cleave Angle				
Now rotating the blade.				
Blade Position: 1 → 2				
Blade Height: L(1)				

2. Active Blade life management

The 41R fusion splicer displays the remaining blade life and informs the user when a blade height change, position change, or new blade is required.

Blade Management

	No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8
H(B)	0	0	0	0	0	0	0	0
M(D)	0	0	0	0	0	0	0	0
L(T)	1060	0	0	0	0	0	0	0
	0.00	0	0	0	0	0	0	0

Blade Height : L(1)

SM AUTO

Recommended Position

Reset

No.4 40mmR Blade Management				
Now rotating the blade.				
Blade Position: 1 → 2				
Blade Height: L(1)				

Instructions for changing position

No.4 40mmR Blade Management

	No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8
H(B)	0	0	0	0	0	0	0	0
M(D)	0	0	0	0	0	0	0	0
L(T)	1060	1175	1167	1522	1134	1530	1439	

	No.9	No.10	No.11	No.12	No.13	No.14	No.15	No.16
H(B)	0	0	0	0	0	0	0	0
M(D)	0	0	0	0	0	0	0	0
L(T)	1185	1218	1025	1407	1338	1484	1259	1060

Blade Height : L(T1)

No.1 SM AUTO Recommended Position

No.4 40mmR Blade Management				
Change the blade height.				
L (1) → M (2)				

Instructions for changing height

No.4 40mmR Blade Management

	No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8
H(B)	1439	1530	1259	1185	1134	1575	1422	1439
M(D)	1484	1185	1218	1025	1407	1338	1484	1060
L(T)	1060	1041	1175	1167	1522	1134	1530	1439

	No.9	No.10	No.11	No.12	No.13	No.14	No.15	No.16
H(B)	1041	1175	1167	1522	1439	1530	1218	1258
M(D)	1422	1530	1439	1218	1377	1422	1484	1060
L(T)	1185	1218	1025	1407	1338	1484	1060	1439

Blade Height : 1422

Change

No.1 SM AUTO Recommended Position


No.4 40mmR Blade Management				
Replace the cleaver blade.				
O.K.				

Instructions for changing new blade

Well-developed operability


1. Simple sleeve centering

The 41R mass fusion splicer features simple sleeve positioning with its designated centering area on top of the tube heater.

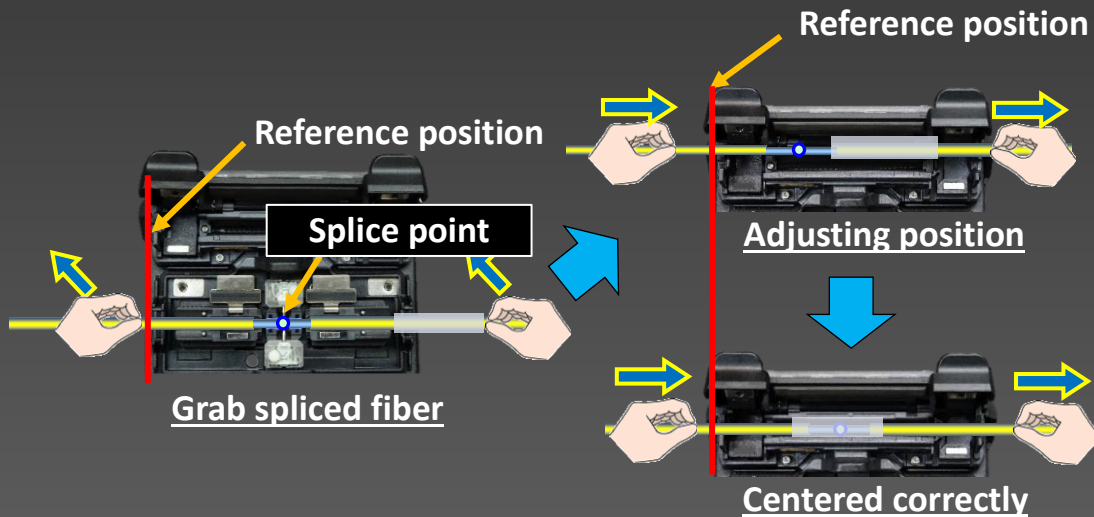

2. Universal Tube Heater

The 41R mass fusion splicer can accommodate a max 6.0mm (before shrinking) diameter protection sleeve. As a result, it supports a wide range of protection sleeve sizes.

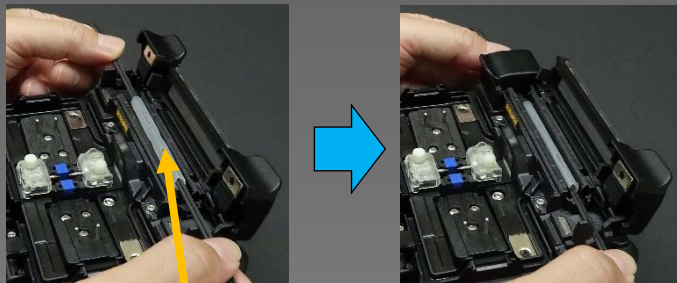

Max. 6.0mm diameter before shrinking

3. Easy replacement of consumable parts

3-1 Tool-less Electrode replacement

The 41R electrode comes as an assembly including the fixing screw. The screw can be tightened by hand without tools, enabling easy electrode replacement.



Electrode replacement without tools

3-2 Easy Maintenance

The CT50 fiber cleaver has a user replaceable blade and rubber clamps - there's no need to send the device to a service center for blade or clamp replacement.



Replaceable rubber clamps

Replaceable cleaver blade

4. Carrying Case

There are multiple ways to utilize the 41R carrying case. The 41R is ready to use just by opening the case, but it is also possible to place the tray on top of the carrying case or only with the work tray depending on the work environment.


5. Work Tray

The tray incorporates a drawer which can be slid open to provide more work-space. A locking mechanism is also provided which secures the alcohol pot in place





Standard Package

41R Standard Package

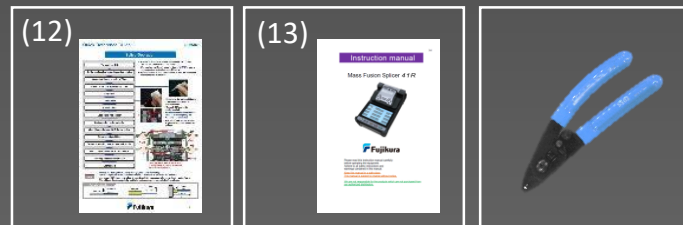

Item	Model	Qty
Mass Fusion Splicer	41R	1 pc
(1) Battery Pack *	BTR-11A	1 pc
(2) AC Adapter	ADC-19A	1 pc
(3) AC Power Cord	ACC-08, 09, 10, 11 or 12	1 pc
(4) USB Cable	USB-01	1 pc
(5) Electrodes, for spare	ELCT2-16B	1 pair
(6) V-groove Cleaning Brush	VCB-01	1 pc
(7) Carrying Case	CC-36	1 pc
(8) Work tray	WT-08	1 pc
(9) Tripod Screw	TS-03	1 pc
(10) Carrying Case Strap	ST-03	1 pc
(11) Alcohol Dispenser	AP-02	1 pc
(12) Quick Reference Guide	QRG-04-E	1 pc
(13) Instruction Manual	PDF file stored in Splicer	
Single Fiber Stripper	SS03	1 pc
Ribbon Fiber Stripper	RS03	1 pc
(1) Battery Pack *	BTR-12A	1 pc
(2) AC Adapter	ADC-09A	1 pc
(3) AC Power Cord	ACC-08, 09, 10, 11 or 12	1 pc
(4) Blade Cleaning Brush	BR5-02	1 pc
(5) Hexagonal Wrench	HEX-01	1 pc
Optical Fiber Cleaver	CT50	1 pc
(1) Fiber Scrap Collector	FDB-05	1 pc
(2) Fiber Setting Plate	AD-10-M24	1 pc
(3) Case, for cleaver	CC-37	1 pc
(4) Hexagonal Wrench	HEX-01	1 pc

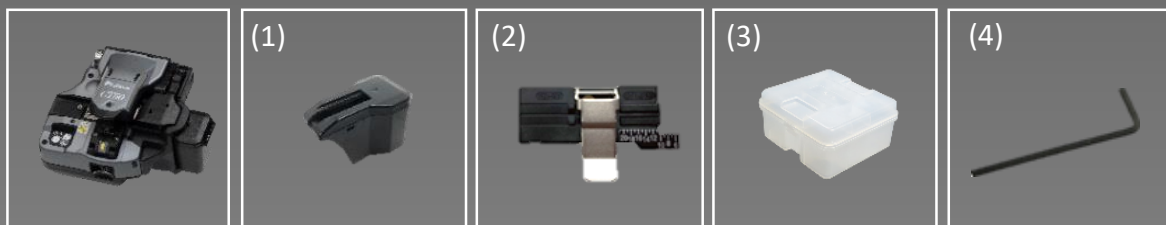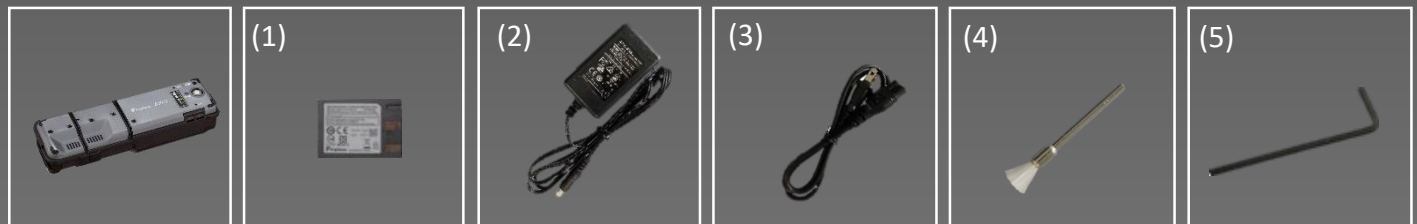

* Please follow IATA regulation when shipping the battery by air.

Specifications

41R Specifications



Item		Specification
Fiber alignment method		Self cladding alignment with surface melting tension
Fiber count can be spliced		Single and up to 4 fiber ribbon
Applicable fiber	Fiber type	Single mode optical fiber Multi mode optical fiber
	Cladding dia.	Approx.125μm
Applicable coating	Fiber holder	Coating shape. : Refer to options Cleave length : Approx. 10mm
		ITU-T G.652 : Avg. 0.05dB ITU-T G.651 : Avg. 0.02dB ITU-T G.653 : Avg. 0.08dB ITU-T G.655 : Avg. 0.08dB ITU-T G.657 : Avg. 0.05dB
Fiber splice performance	Splice loss *1	SM FAST mode : Avg. 10 to 12sec. SM AUTO mode : Avg. 15 to 18sec.
		Splice time *2
Applicable protection sleeve	Sleeve type	Heat shrinkable sleeve
	Sleeve length	Max. 66mm
	Sleeve dia.	Max. 6.0mm before shrinking
Sleeve heat performance	Heat time *3	40mm FP-04T mode : Avg. 29 to 30sec. Single 60mm mode: Avg. 25 to 27sec.
Fiber tensile test force		Approx. 2.0N
Electrode life *4		Approx. 2000 splices
Physical description	Dimensions W	Approx.131mm without projection
	Dimensions D	Approx.201mm without projection
	Dimensions H	Approx.79mm without projection
	Weight	Approx. 1.2kg including battery
Environmental condition	Temperature	Operate : -10 to 50°C Storage : -40 to 80°C
		Humidity
	Altitude	
	AC adaptor	Input
Battery pack	Type	Rechargeable Lithium Ion
	Output	Approx. DC14.4V, 3190mAh
	Capacity *5	Approx. 140 splice and heat cycles
	Temperature	Recharge : 0 to 40°C Long Term Storage : -20 to 30°C
	Battery life *6	Approx. 500 recharge cycles
Display	LCD monitor	TFT 4.9 inches with touch screen
	Magnification	Approx. 44 to 66X
Illumination	V-grooves	LED lamp
Interface	PC	USB2.0 Mini B type
	External LED lamp	USB2.0 A type Approx. DC5V, 500mA
		Wireless *7
	Data storage	Splice mode
Heat mode		30 heat modes
Splice result		10000 splices
Splice image		100 images
Screw hole for tripod		1/4-20UNC
Other features	Automatic functions	Splice mode select by fiber count analysis Fusion power calibration
	Reference guide	PDF file stored in splicer
	Electrode	Replaceable without tool

41R Options

Item	Model	Remark
Fiber holder	FH-70-200	200μm coating diameter
	FH-70-250	250μm coating diameter
	FH-70-900	900μm coating diameter
	FH-70-2	2 fiber ribbon
	FH-70-4	4 fiber ribbon
	FH-FC-20	900μm in 2mm diameter cable
	FH-FC-30	900μm in 3mm diameter cable
	FH-60-LT900	900μm loose buffer cable
Transfer Clamp	CLAMP-DC-12	Transferring drop cable on work tray
Protection sleeve	FP-04(T)	40mm, up to 8 fiber ribbon

Notes

- *1 Measured with a cut-back method relevant to ITU-T and IEC standard after splicing Fujikura identical fibers. The average splice loss changes depending on the environmental condition and fiber characteristics.
- *2 Measured at room temperature. The definition of splice time is from the fiber image appeared in LCD monitor to the estimated loss displayed. The average splice time changes depending on the environmental conditions, fiber type, and fiber characteristics.
- *3 Measured at room temperature with the AC adapter. The heat time is defined from the start beep sound to the finish beep sound. The average heat time changes depending on the environmental conditions, sleeve type and battery pack condition.
- *4 The electrode life changes depending on the environmental conditions, fiber type and splice modes.
- *5 Test condition
 - (1) Splice and heat time: 2 minute cycle
 - (2) Using the splicer power save settings, subject to our testing condition.
 - (3) Using a not degraded battery
 - (4) At room temperature
 The battery capacity changes when testing with different conditions to the above.
- *6 The battery capacity decreases to a half after approx. 500 discharge and recharge cycles, The battery life is shortened further when using outside of the storage temperature range, operating temperature range, if completely discharged by storing for a long time without recharging.
- *7 Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.

Specifications

CT50 Specifications



Item		Specification
Applicable fiber	Fiber type	Single mode optical fiber
		Multi mode optical fiber
	Fiber count	Single and up to 16 fiber ribbon
	Cladding dia.	Approx. 125μm
Applicable coating	Fiber setting plate	AD-10-M24 : Max. 900μm coating diameter
		AD-50 : Max. 3mm coating diameter
		AD-16A : Max. 900μm coating diameter 1 fiber + Max. 250μm coating diameter 1 fiber
	Fiber holder	Coating shape. : Refer to splicer options
Cleave length	Fiber setting plate	AD-10-M24 : 5 to 20mm *1
		AD-50 *C.D. : coating diameter C.D. = 250μm or less : 5 to 20mm *1 250μm < C.D. < =900μm : 10 to 20mm 900μm < C.D. < =3mm : 14 to 20mm
		AD-16A : 5 to 20mm *1
		Fiber holder
	Cleave angle *2	Single fiber
Fiber ribbon		Avg. 0.3 to 1.2 degrees
Blade life *3		Approx. 60000 fiber cleaves
Physical description	Dimensions W	Approx. 117mm without projection *4
	Dimensions D	Approx. 94mm without projection *4
	Dimensions H	Approx. 59mm without projection *4
	Weight	Approx. 306g including battery and AD-10-M24
Environmental condition	Temperature	Operate : -10 to 50°C
		Storage : -40 to 80°C
	Humidity	Operate : 0 to 95%RH non-condensing
Storage : 0 to 95%RH non-condensing		
Battery		2 pieces of LR03, AAA dry battery
Wireless interface *5		Bluetooth 4.1 LE
Screw hole for tripod		1/4-20UNC
Holding mechanism for the fiber holder		Equipped
Other features	Blade rotation	Motorized rotation
		Manual rotation dial
	Replaceable parts	Blade
		Clamp arm

CT50 Options

Item	Model	Remark
Fiber Setting Plate	AD-50	Max. 3mm coating diameter
	AD-16A	Max. 900μm coating diameter 1 fiber + Max. 250μm coating diameter 1 fiber
Blade	CB-08	Blade for replacement
Clamp Arm	ARM-CT50-01	Clamp arm with anvil for replacement
Fiber Scrap Collector	FDB-05	Spare scrap collector
Side cover	SC-CT50-01	Side cover instead of scrap collector
Spacer	SPA-CT08-10	Cleave length 10mm
	SPA-CT08-09	Cleave length 9mm
	SPA-CT08-08	Cleave length 8mm

Notes

*1 When the cleave length is less than 10mm, the coating diameter should be 250μm or less. Also, a blade height adjustment is required before cleaving. The average cleave angle is worse than the specification when the cleave length is less than 10mm.

*2 Measured with an interferometer at room temperature, not with a splicer. A new blade was used to cleave both the single fibers and ribbon fibers. The average cleave angle changes depending on the environmental conditions, blade condition, operating method, and cleanliness.

*3 The blade life changes depending on the environmental conditions, operating method, and the fiber type cleaved.

*4 Measured in a condition when closing the lever.

*5 Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.

RS03 Specifications



Item		Specification
Applicable fiber	Fiber type	Single mode optical fiber
		Multi mode optical fiber
	Fiber count	Single and up to 16 fiber ribbon
	Cladding dia.	Approx. 125μm
	Coating dia.	200 to 400μm
Stripping length		Max. 35mm
Heat time *1		Approx. 3sec
		Approx. 5sec with Eco-mode
Heat temperature		85 to 140°C
Physical description	Dimensions W	Approx.156mm without projection
	Dimensions D	Approx.49mm without projection
	Dimensions H	Approx.37mm without projection
	Weight	Approx. 265g including battery
Environmental condition	Temperature	Operate : -10 to 50°C
		Storage : -40 to 80°C
	Humidity	Operate : 0 to 95%RH non-condensing
		Storage : 0 to 95%RH non-condensing
AC adaptor	Input	AC100 to 240V, 50/60Hz, Max. 0.58A
DC input		DC10 to 17V, Approx. 1A
Battery pack	Type	Rechargeable Lithium Ion
	Output	Approx. DC7.2V, 1840mAh
	Capacity *2	Approx. 600 times with Eco-mode
	Temperature	Operate : -10 to 50°C
		Recharge : 0 to 40°C
		Long Term Storage : -20 to 30°C
Battery life *3	Approx. 500 recharge cycles	
Wireless interface *4		Bluetooth 4.1 LE
Other features	Stripping force	Lower stripping force design
	Automatic heat setting	Controlled from splicer or smartphone


Notes

*1 Measured at room temperature. The heat time changes depending on the environmental conditions and fiber coating type.

*2 Tested at room temperature with a not degraded battery and Eco-mode. The number of cycles changes depending on the environmental conditions, stripper settings and battery degrading condition.

*3 The battery capacity decreases to a half after approx. 500 discharge and recharge cycles, The battery life is shortened further when using outside of the storage temperature range, operating temperature range, if completely discharged by storing for a long time without recharging.

*4 Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.

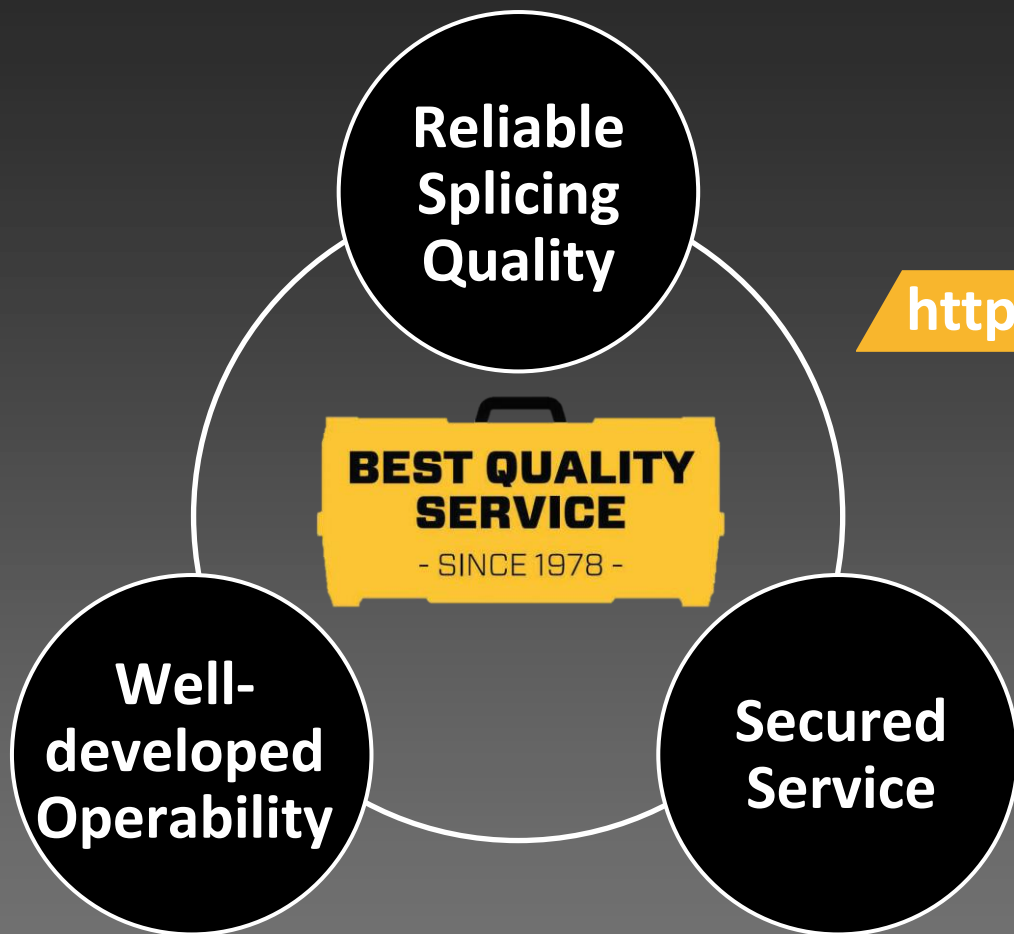

Please visit our web site!

<https://www.optic-product.fujikura.com/>



Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan
General inquiries : +81-3-5606-1164
Service & support : +81-43-484-3962 <https://www.fujikura.com>

Fujikura Asia Ltd.

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967
General inquiries, Service & support : +65-6-278-8955
<https://www.fujikura.com.sg>

Fujikura Europe Ltd.

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, United Kingdom
General inquiries : +44-20-8240-2000
Service & support : +44-20-8240-2020 <https://www.fujikura.co.uk>

AFL

110 Hidden Lake Circle Duncan, SC 29334, USA
General inquiries : +1-800-235-3423
Service & support : +1-800-866-3602 <https://www.aflglobal.com>

Fujikura (China) Co., Ltd.

7th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai 200120, CHINA
General inquiries, service & support : +86-21-6841-3636 <http://www.fujikura.com.cn>