

CT-20

series

High Precision Fiber Cleaver

New Product



Fiber Placing



ONE - Action Cleaving!

FEATURES

- Easy one-action cleaving for speedy and skill-free operation
- Longer blade life (3 height × 16 rotating positions)
- Light weight and user friendly shape
- Applicable up to 24-fiber ribbon cleaving
- Optional fiber collector for fiber scrap


The CT-20 series Cleavers the best for Single and Mass Fiber cleaving

Type List	
CT-20	Main Body
CT-20-11	with AD-11 Fiber Plate
CT-20-12	with AD-12 Fiber Plate
CT-22	Use for FSM-40F/PM

Options	
FC-01	Fiber Collector for collecting fiber scrap
SPA-40-CT22-040	Cleaver Spacer for 9mm length cleaving of CT-22
SPA-40-CT22-050	Cleaver Spacer for 10mm length cleaving of CT-22

Specification	
Applicable Optical Fiber	Silica Optical Fiber
Bare Fiber Diameter	125 microns nominal
Blade Positions	3 height positions, 16 rotating positions
Minimum Blade Life	48000 fibers
Cleaving Angle	0.5 degrees (single fiber)
Dimensions (mm)	110X 76 X 49 (110 X 117 X 49 including Fiber Collector)
Weight	370g (460g including Fiber Collector)

Fiber Collector FC-01 (Option)

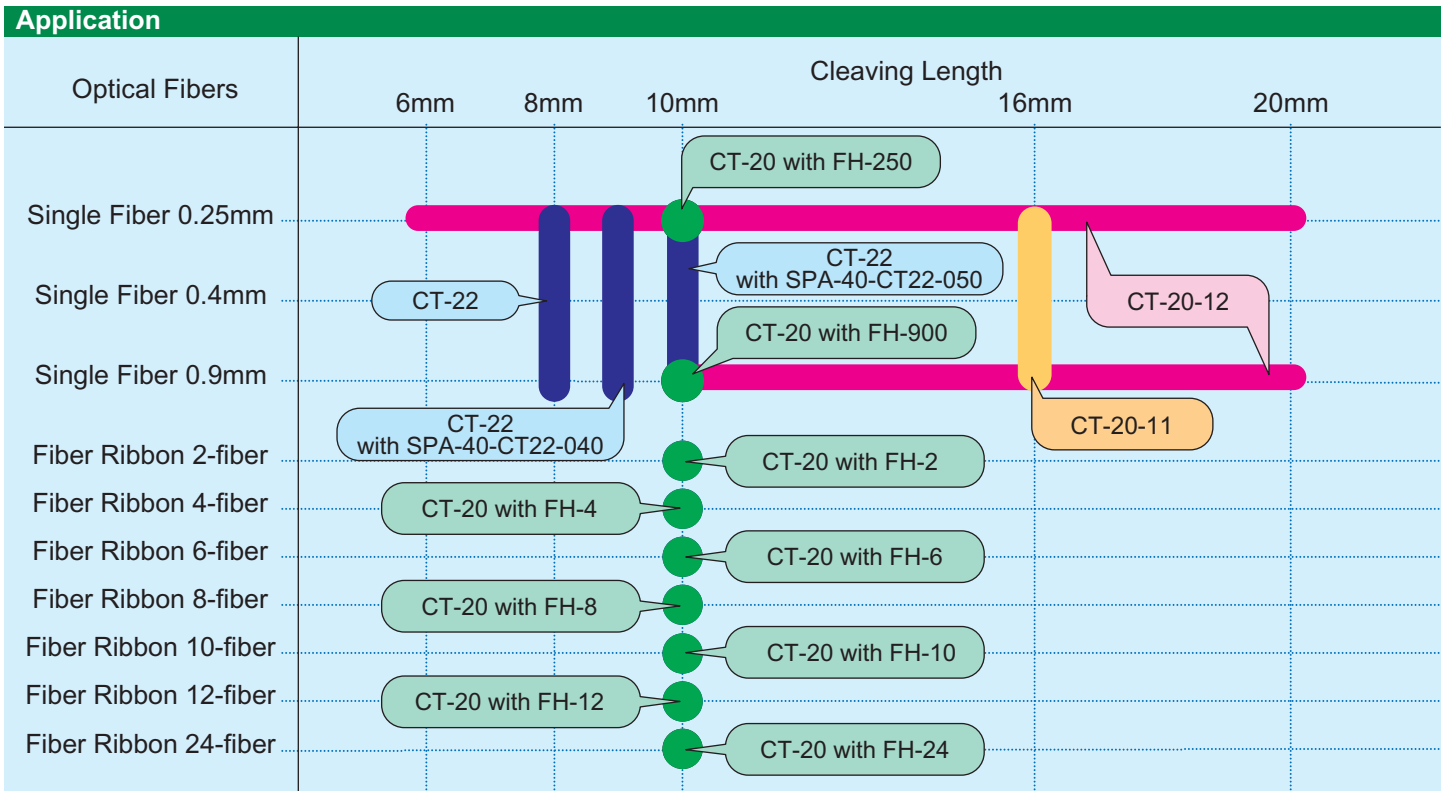

Fiber Holders	for Ribbon / Bundle Fibers							for Single Fibers	
	FH-2	FH-4	FH-6	FH-8	FH-10	FH-12	FH-24	FH-250	FH-900
Fiber Holder									
Fiber Count	2	4	6	8	10	12	24	1	1
Cleaving Length (mm)	10							10	

Specification subject to change without prior notice.

Fujikura Ltd.

Fujikura Europe Ltd.

Alcoa Fujikura Ltd. Telecommunications Division

Fujikura Asia Limited

1-5-1, kiba, koto-ku, Tokyo 135-8512, Japan

Phone : +81-3-5606-1164 Fax : +81-3-5606-1534 <http://www.fujikura.co.jp>

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, UK

Phone : +44-208-240-2000 Fax : +44-208-240-2010 <http://www.fujikura.co.uk>

260 Parkway East, Duncan, SC29334, USA

Phone : +1-800-AFL-FIBER Fax : +1-864-433-5560 <http://www.afl-link.com>

460 Alexandra Road #22-02 PSA Bldg., Singapore 119963

Phone : +65-278-8955 Fax : +65-237-7705 <http://www.fujikura.com.sg>